

## LT84121ME

### DESCRIPTION: Super Duty High Flow Reel

Designed for use with 50ft of 1-1/4" ID hose or smaller. Suitable for gasoline, diesel fuel, fuel oil, petroleum oil, water, transmission fluids, aircraft fuels, and air. For hazardous fluids, hose with static grounding wire must be used. For aircraft fuels, a separate static grounding cable must be furnished by user. Max. Operating pressure: 375 PSI; inlet and outlet: 1-1/4" NPT female. Includes No. 84122 ball stop; adjustable for use with 1-3/4" OD or 1-7/8" OD hose: Reel Size: 26-1/2" high, 18-3/4" wide and 25-1/2" deep

Type: Low Pressure: 375 PSI

Inlet / Outlet: 1-1/4" (F)

Sheath Width Outside to Outside: 10-1/4"

Sheath Width Indiside to Inside: 10.0"

Sheath Depth: 6-27/32"

Diameter of Sheath: 24.0"

Base: 14-1/2" x 15"

Base Thickness:

Length of Arm: NA


Solid Metal Rollers with a diameter of: 10.0" x 2-3/4"

Applications: Oil, ATF, Antifreeze, Water, Air;

Combustible, Fuel Oil, Diesel, Gas, Aircraft Fuels,

Petroleum Oils, and Transmission Fluids.

Carries Hose: SAE100R1 3/4"ID X 1-1/4OD 50 FT

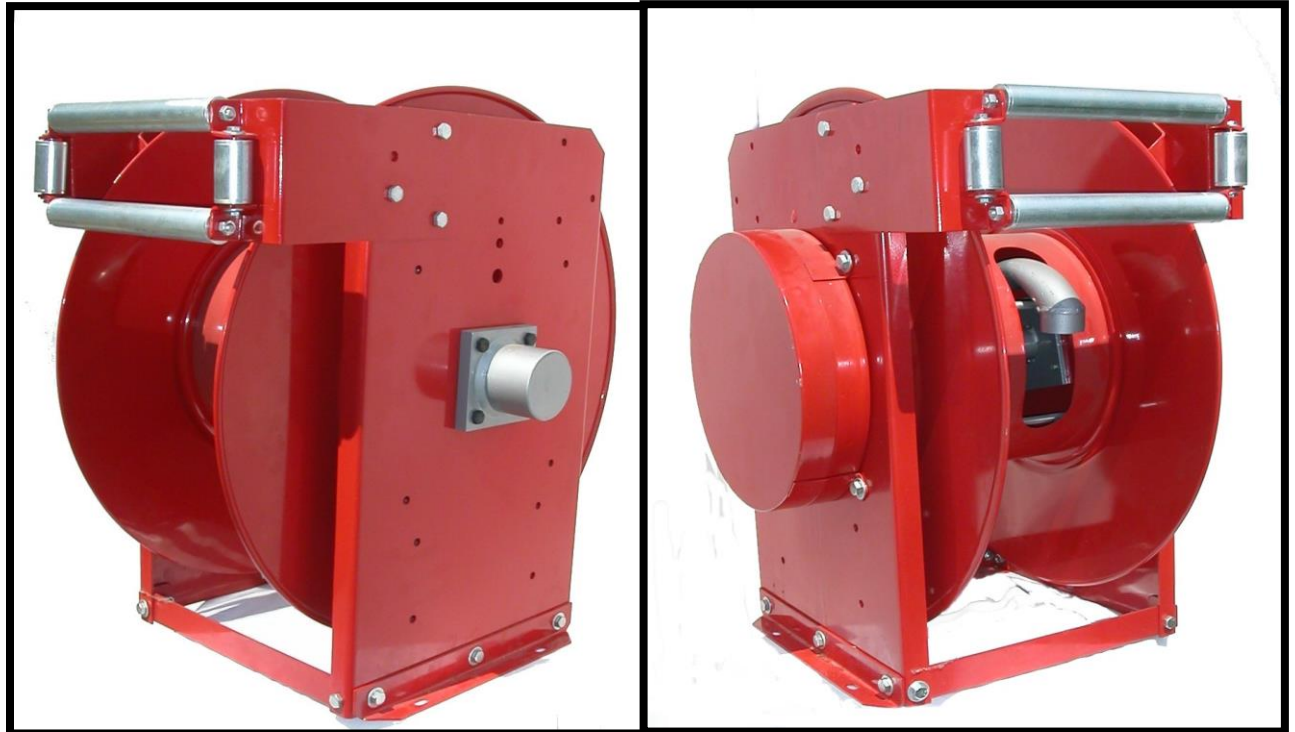

**BOX Weight:** 80LBS

**BOX Dimensions:** 24" x 24" x 16" (61cm x 61cm x 40.6cm)

**Application:** Installed Lube in Garage, Maintenance Facility, Quick Lube, Industrial, Factory, Mines, Mining Vehicle, Service Vehicle, Lube Truck

### DESCRIPTION:

Super Duty High Flow Reel

	HOSE CAPACITY	SAE	LENGTH	INLET / OUTLET	WORKING PRESSURE	SHEAVE WIDTH	INSTALLATION WIDTH	DEPTH
	1-1/4" (3.175CM) OD	100R3	50 FT	1-1/4"	375 PSI	10"	18-3/4"	16-3/4"
	LOW PRESSURE		15.2 mtrs	3.175CM		25.4CM	47.6CM	42.5CM

**WILLMAR INTERNATIONAL LLC / LUBE TECHNOLOGY**

P.O. BOX 456; ADA, MI. 49301 USA

TEL: 616-676-1792; FAX: 616-676-1287

Contact: [willmarllc@gmail.com](mailto:willmarllc@gmail.com)

Website: <http://www.iserv.net/~wmograpy/lube.html>



"Doing Business with the World"

**WILLMARLUBE**

P.O. BOX 456; ADA, MI. 49301 USA

TEL: 616-676-1792; FAX: 616-676-1287

Contact: [sales@willmarlube.com](mailto:sales@willmarlube.com)

Website: <http://www.willmarlube.com>